

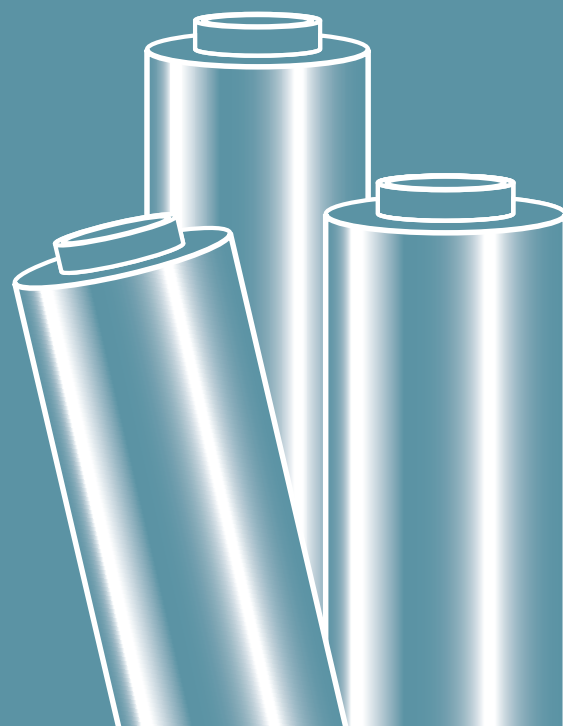
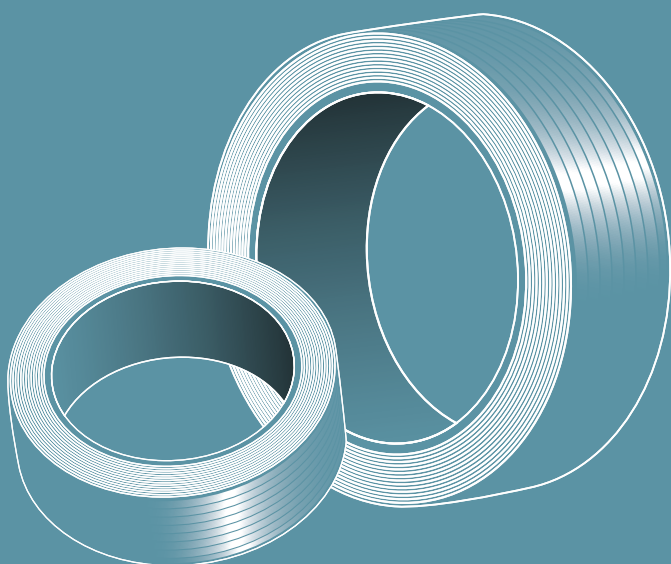
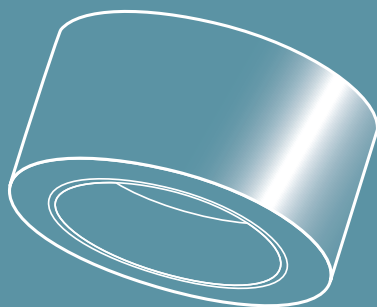


LARMONT





ABOUT COMPANY2

PACKAGING MATERIALS..... 4

STRETCH FILMS 4

BUBBLE WRAPS 9

ADHESIVE TAPES 10

 ACRYLIC TAPES 12

 LOW NOISE TAPES 15

 SOLVENT AND HOT-MELT TAPES 15

 ECO PAPER TAPE 16

TAPES DISPENSERS 17

ADHESIVE TAPES WITH CUSTOMIZED PRINTING 18

TECHNICAL TAPES 20

 MASKING TAPES 21

 DUCT TAPES 21

 DOUBLE-SIDED TAPES 21

PP AND PET STRAPPING BANDS 24

SUSTAINABLE DEVELOPMENT. RECYCLING PROJECTS 28

ABOUT COMPANY



LARMONT is one of the biggest distributors of cargo packaging materials delivered to companies from various industries. We deliver packaging within European countries in 24 - 72 hours.

LARMONT's own distribution network allows the company to provide a consistently high level of service and a high speed of supply.

COMPANY'S VALUES:

People

The main value of the company are its people. Their personal qualities and professional achievements allow LARMONT to achieve the most ambitious goals.

Honesty

We are honest and open towards each other, towards our clients and partners. Honesty allows us to maintain trust and a friendly atmosphere, at the same time being a guarantee of transparency in our work.

Conscientiousness

We timely and efficiently carry out our obligations to colleagues, clients and partners. Business reputation is our common concern and responsibility.

Efficiency

Using resources responsibly and maintaining a high level of productivity allows our company to achieve the goals.

Constant development

We strive for professional growth and personal improvement. The atmosphere of constant development is created and supported within our company.

Teamwork

We have common goals. Only together we are a company. We jointly solve the performance targets and complement each other with our knowledge and skills.



DISTRIBUTION

LARMONT's own network of sales offices allows the company to provide a consistently high level of service and a high level of delivery speed.



DEVELOPMENT

In 2016, the company began to actively explore the European market. Today, LARMONT Europe strives to enter the TOP-5 suppliers of transport and food packaging products in Europe.



PARTNERS

LARMONT's partners are the largest retailers, manufacturers of food and other FMCG products, as well as all large enterprises that have to regularly transport their products.



Reliability

30 years in the markets of polymer packaging



Team

Experienced team



Products


2000 SKUs on stock



Customers

5000 satisfied customers

STRETCH FILMS

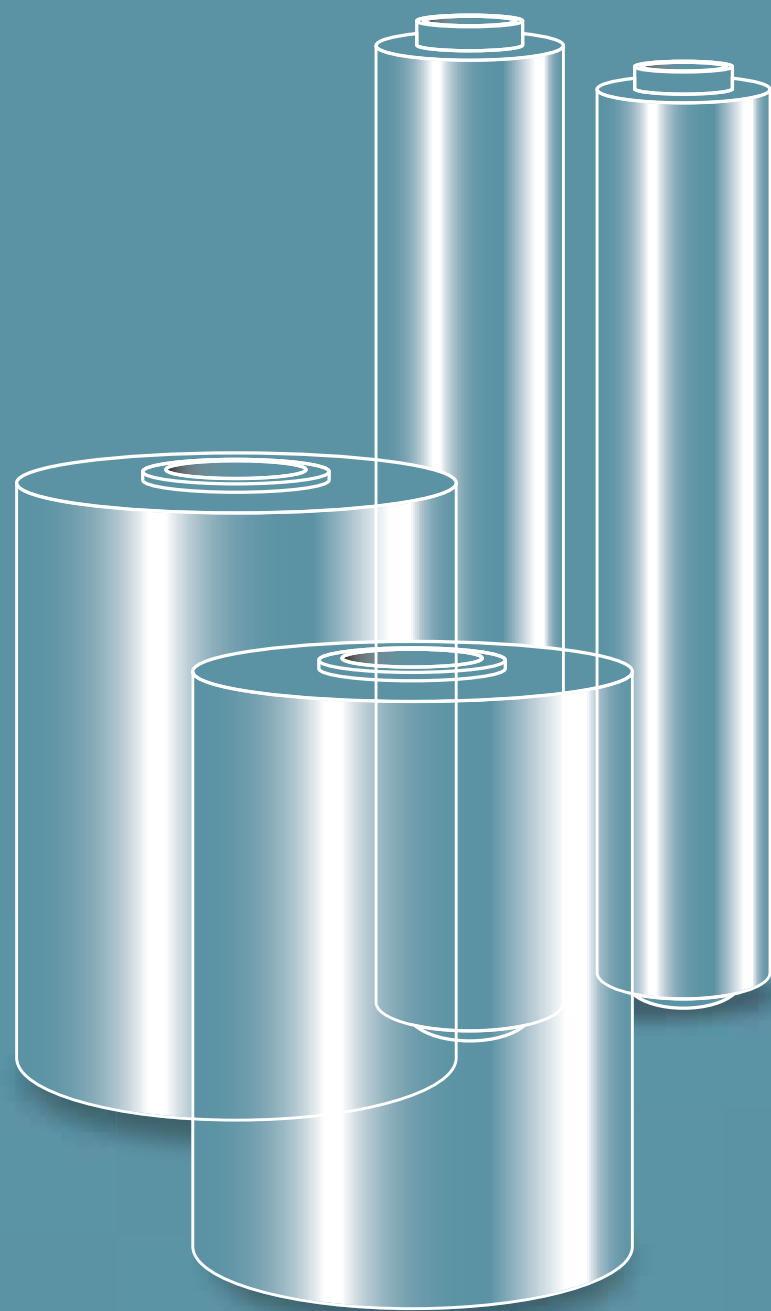

Stretch films

Stretch film is a modern packaging material used for group packaging of goods on a pallet, for further transportation. The most important features of the stretch film are flexibility, stickiness (thus the film is tightly adhered to the pallet), thermoplasticity and transparency (except for black film). Thanks to its properties, it is easy to use and perfectly protects the load.

Larmont offers the following types of stretch films:

- Standard stretch film for manual packaging;
- Standard stretch film for machine packaging;
- Power stretch film for machine packaging;
- Super Power stretch film for machine packaging.

The right choice of stretch film allows our customers to apply the most optimal solutions for packaging systems, in terms of safety and savings.

STANDARD STRETCH FILM FOR MANUAL PACKAGING

Standard film for manual packaging of both pallets and smaller packages.

In our offer we have films with the thickness from 10 to 35 microns, with different widths, weight and length of winding.

Transparent films are standard in our offer, but we can also deliver films in different colors.



Recommended application	For manual packaging
Thickness [μm]	10-35
Stretch [%]	70-120



STRETCH FILMS FOR MACHINE PACKAGING

STANDARD
Standard machine stretch film, with a stretch from 100 to 180% (depending on the thickness of the film), for pallet wrappers with a maximum rotation up to 12 revolutions per minute.

POWER
Machine stretch film, for pallet wrappers, with pre-stretch up to 220-280% and rotation frequency up to 30 revolutions per minute.

SUPER POWER
Technologically advanced stretch film, for pallet wrappers, with pre-stretch up to 240-350% and rotation frequency up to 72 revolutions per minute.
When operating at frequencies above 40 rpm the working pre-stretch decreases in proportion to the speed.



- Advantages of using POWER and SUPER POWER stretch films in comparison with STANDARD stretch films are:
- optimization of costs per packaging unit and, as a result, reduction of the budget for the packaging materials purchase (about 10-15%);
 - stability and repeatability of the packaging process;
 - reduction of waste;
 - saving time and space (more pallets wrapped using one roll).

Type of film	STANDARD	POWER	SUPER POWER
Recommended application	For semi-automatic pallet packers with pre-stretch up to 180%	For pallet wrappers with pre-stretch up to 280% and rotation speed up to 30 rpm.	For pallet wrappers with pre-stretch up to 350% and rotation speed up to 72 rpm.
Thickness [μm]	15 - 35	12 - 35	15 - 27
Stretch [%]	100 - 180	220 - 280	240 - 350



LARMONT

Larmont -
converting systems - we
will meet your every need
for a non-standard stretch
film size.



STANDARD BUBBLE WRAP

Bubble wrap is a flexible, transparent material, used in many industries for packaging and securing a variety of products. Air bubbles, placed at regular intervals, provide great cushioning for valuable and fragile items.

In our offer we have films of various weight and maximum width up to 150cm. We can adjust the length of the film to the customer's needs.



Contact us to choose the film that will satisfy Your needs.

Advantages of bubble wrap:

- provides excellent cushioning,
- protects against water, moisture, pollution and temperature changes,
- ideal for securing furniture, glass, ceramics, electronic equipment and many other objects,
- perfect for replenishing free spaces in collective packaging,
- recyclable.



ADHESIVE TAPES

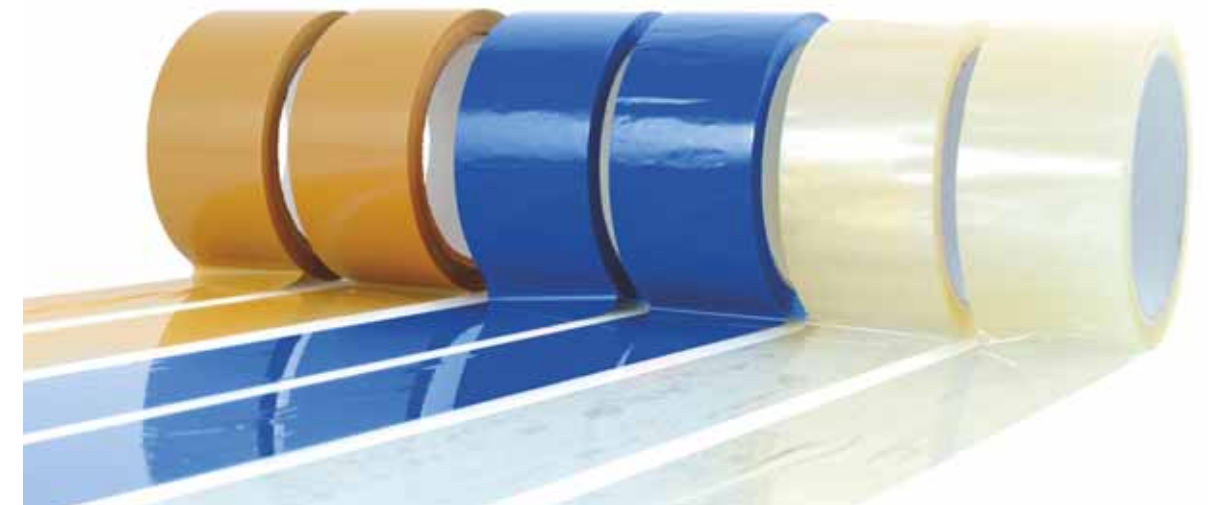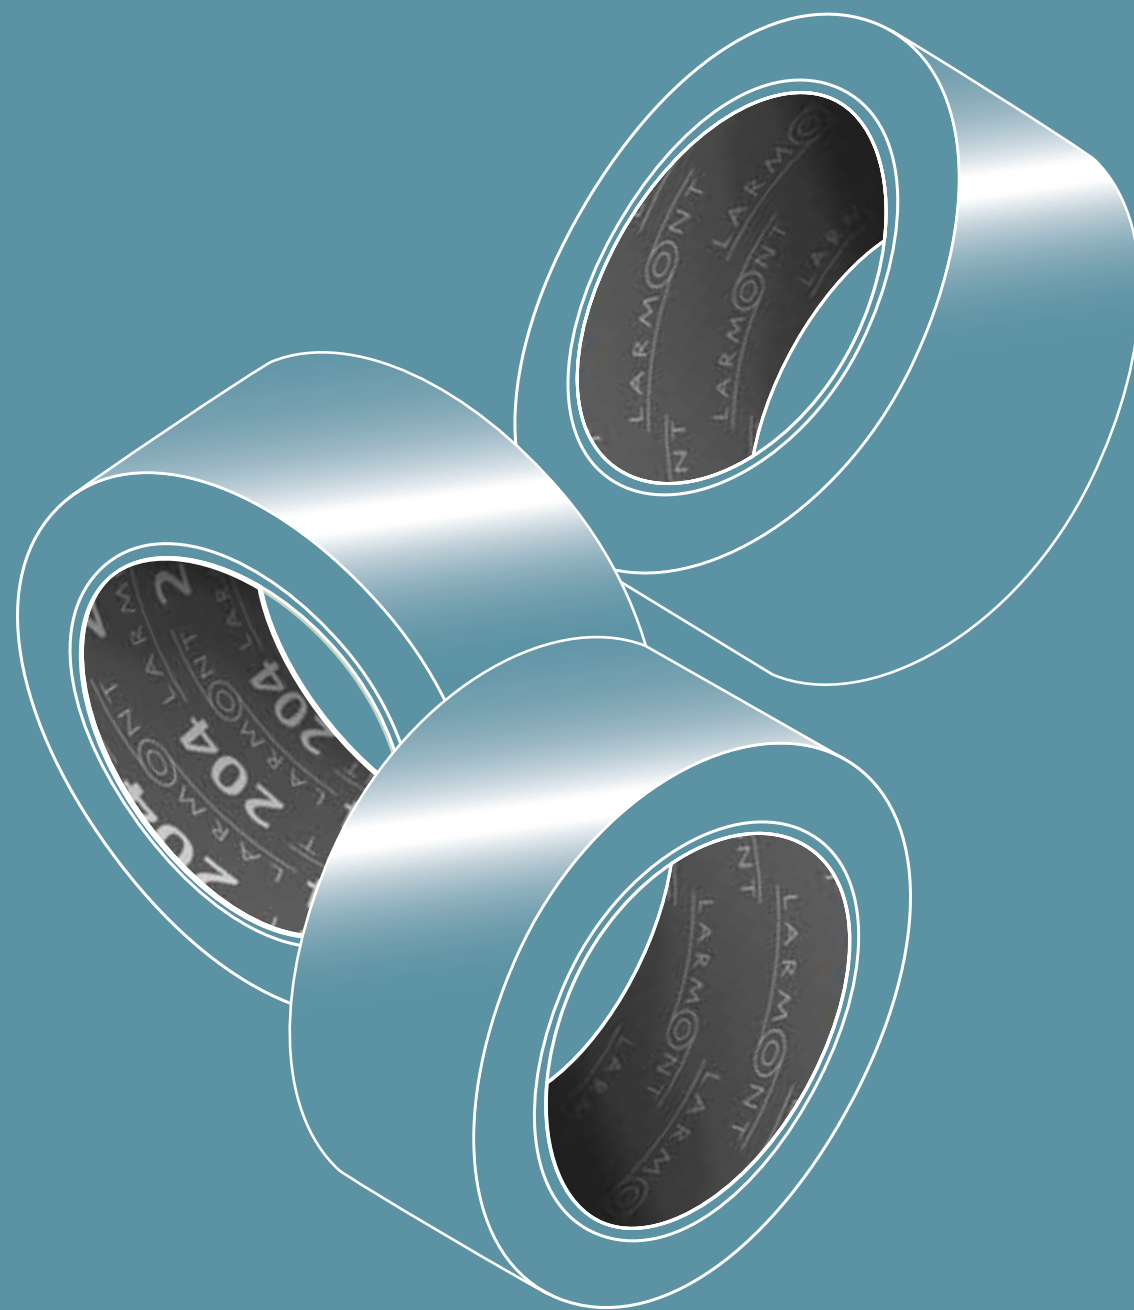

Larmont line includes various types of packaging adhesive tapes designed for both professional use in various industries and home use.

The advantages of Larmont packaging adhesive tapes are stability, high quality and a guarantee of compliance with all specified parameters.

We offer tapes of various widths, lengths and colors.









Standard tape widths: 25, 48, 50, 70, 72, 75 mm.


Standard tape lengths: 45, 66, 120, 132, 150 m (for manual application),
900 and 990 m (for machine application).


Larmont offers packaging tapes based on acrylic, hot-melt and natural rubber adhesive. A wide range of available sizes, types and thicknesses allows to choose the tape according to every need.

The tapes characteristics and sizes can be selected individually for each customer.



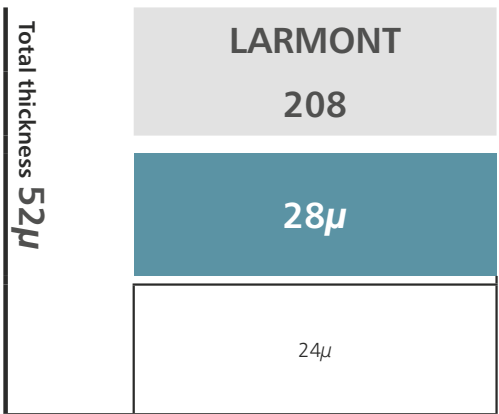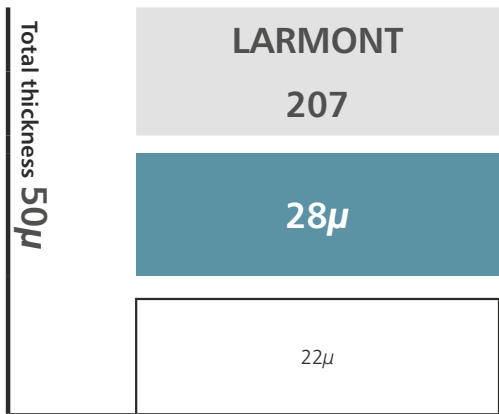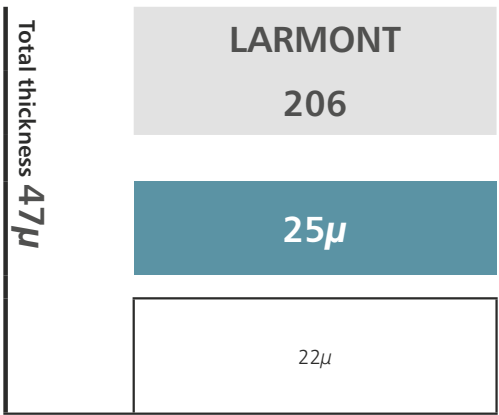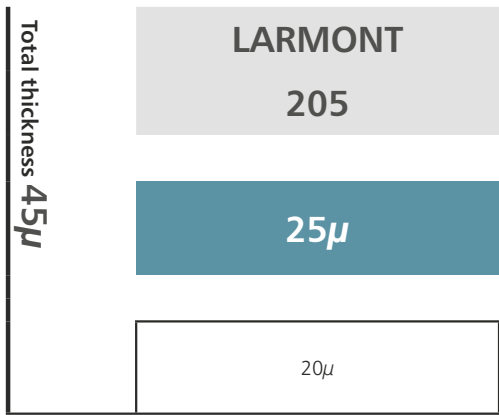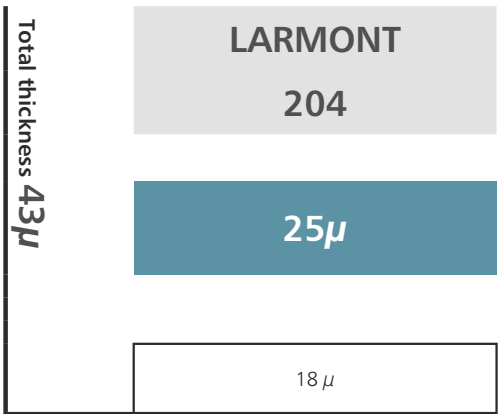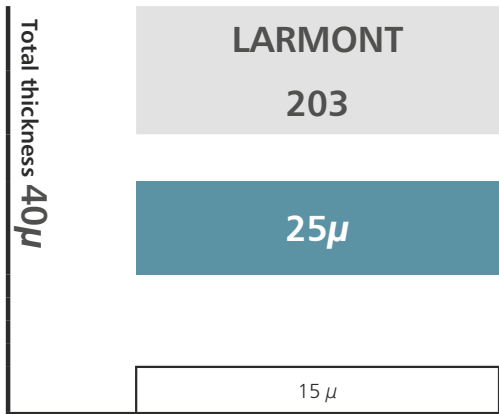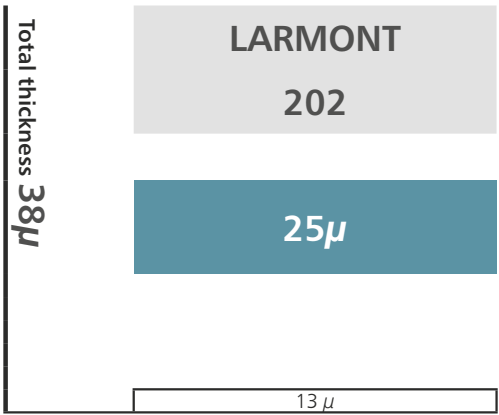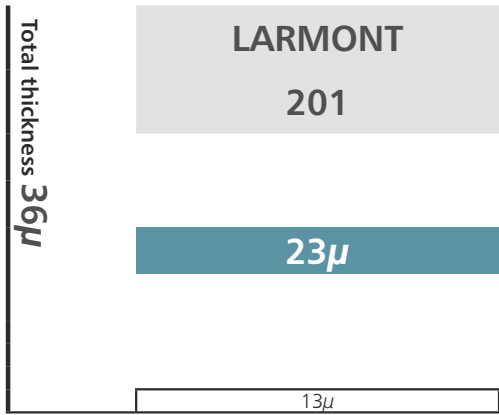

 BOPP film (micron)

 Acrylic glue (micron)

201



Universal adhesive tape for most applications requiring protection and packaging. Adhesive tape is resistant to chemical and ultra violet effect, as well as highly resistant to the aging process.

Color: ☐ ☒

transparent, brown

Adhesive: acrylic

Type of tape	Roll width [mm]	Roll length [m]	Total thickness [µ]
201	48, 75	40, 50, 57, 66, 100, 120, 150	36
202	48, 75	36, 50, 57, 66, 100, 150	38

202



Universal packaging tape with increased film thickness. This tape provides a secure sealing and good adhesion to a variety of surfaces. This is the best solution when the cost-effectiveness and mechanical parameters play a vital role.

Color: ☐ ☒

transparent, brown

Adhesive: acrylic

203



Universal packaging tape with increased adhesive layer. It is recommended for use if you want to achieve a permanent bonding, resistant to environmental influences. It can be used both at home and in the industry for packing low weight carton boxes (up to 2-3 kgs).

Color: ☐ ☒ ☒

transparent, brown, honey (bio-solvent)

Adhesive: acrylic, bio-solvent

Type of tape	Roll width [mm]	Roll length [m]	Total thickness [µ]
203	48, 75	36, 50, 57, 66, 100, 150	40
204	48, 75	57, 66, 100, 150, 990	43

204



Universal tape for packaging light weight carton boxes with cardboard thickness not exceeding 2.5 mm and weight up to 5-6 kgs. Available in manual and machine type.

Color: ☐ ☒ ☒ ☒ ☒ ☒ ☒ ☒ ☒

transparent, brown, honey (bio-solvent), red, orange, yellow, green, blue, white,

Adhesive: acrylic, bio-solvent



205

Due to increased thickness of the adhesive layer this tape works well on corrugated board with a rough surface made of recycled paper. It can be used in cold conditions. The sealed carton boxes can be stored at minus temperatures. Available in manual and machine type.

Color: ☐ ☒ ☐

transparent, brown, honey (bio-solvent)

Adhesive: acrylic, bio-solvent

Type of tape	Roll width [mm]	Roll length [m]	Total thickness [μ]
205	48 , 50, 70, 75	57, 66, 100, 150, 990	45
206	25, 48, 50, 75	66, 100, 150, 990	47



207

Thanks to the use of thicker film backing, this tape can be easily used on sealing machines. It is also recommended if you need a tape with increased strength. It can be used at 1 °C to +10 °C. Available in manual and machine type.

Color: ☐ ☒ ☐

transparent, brown, honey (bio-solvent)

Adhesive: acrylic, bio-solvent

Type of tape	Roll width [mm]	Roll length [m]	Total thickness [μ]
207	48, 50, 75	54, 60, 66, 990	50
208	48, 50, 75	54, 60, 66, 990	52



206

This tape is dedicated for sealing big weight boxes. It can be used in cold conditions (from + 3 °C to + 10 °C). After sealing, boxes can be stored at minus temperatures. Available in manual and machine type.

Color: ☐ ☒ ☐

transparent, brown, honey (bio-solvent)

Adhesive: acrylic, bio-solvent



208

Due to the increased thicknesses of the film backing and adhesive layer, the 208 tape has the best strength and adhesive properties. It is recommended for all types of carton boxes, including recycled ones. It can be used for carton boxes packaging in the refrigeration units at temperatures from 0 °C to 10 °C and after sealing, it can be stored at negative temperatures. Available in manual and machine type.

Color: ☐ ☒ ☐

transparent, brown, honey (bio-solvent)

Adhesive: acrylic, bio-solvent



LOW NOISE TAPE

LOW NOISE tapes allow for quiet operation during application. Perfect for use in large production halls or for any entrepreneur who values comfort at work - his/hers and the employees. This tape can be applied to various types of paper and cardboard packaging, including recycled ones. It is suitable for use in a wide temperature range, also in cold and wet environments. Perfect for light and medium-heavy cardboard boxes.

Color: ☐ ☒

transparent, brown

Adhesive: acrylic

Type of tape	Roll width [mm]	Roll length [m]	Total thickness [μ]
LOW NOISE 204	48 , 50	50, 54, 66, 132	43
LOW NOISE 205	48 , 50	50, 54, 66, 132	45
LOW NOISE 206	48 , 50	50, 54, 66, 132	47
LOW NOISE 207	48 , 50	50, 54, 66, 132	50
LOW NOISE 208	48 , 50	50, 54, 66, 132	52



HOT-MELT TAPE

This range of tapes is made with synthetic-rubber adhesive which is known for its quick bond to the surface. This solventless tape is a good solution where high tack and good stability in a wide range of temperatures are needed.

Color: ☐ ☒

transparent, brown

Adhesive: hot-melt

Type of tape	Roll width [mm]	Roll length [m]	Total thickness [μ]
204 HOT-MELT	48	54, 60	42
207 HOT-MELT	48	54, 60	49
204 SOLWENT	48	54, 60	42
207 SOLWENT	48	54, 60	50



SOLVENT TAPE

This tape is dedicated to the most demanding utility and challenging environments. The natural-rubber adhesive gives this product high tack features as well as ensures its outstanding adhesive ones under the widest temperature range.

Color: ☐ ☒

transparent, brown

Adhesive: solvent



PAPER TAPE

High-quality paper packing tape, suitable for recycling in the paper recycling stream without needing to peel off the cardboard packages.

- Adhesive based on natural rubber – persistent adhesion to the surface, suitable also for the most demanding cardboard boxes;
- Easily applicable by hand – without the need to cut the tape off the roll;
- High initial adhesion to cardboard packaging – permanent seal immediately after gluing;
- Adhesion to stainless steel: 6 ± 1 [N/25mm];
- Application at a temperature of 15 °C and above; storage of sealed boxes at -20 °C to +40 °C.

Color: ●
brown
Adhesive: natural-rubber

Type of tape	Roll width [mm]	Roll length [m]	Total thickness [μ]
PAPER TAPE	50	50	120

ADHESIVE TAPES DISPENSERS

It is universal tool for manual application of adhesive tape. Dispenser is a necessary equipment for anyone who would like to quickly and safely seal the packaging with tape. A comfortable handle, blade guard, as well as the best quality materials, make it an ergonomic tool that facilitates everyday work on a production line or a warehouse.




Dispenser for packing tapes up to 50 mm wide.



Dispenser for packing tapes up to 75 mm wide.



ADHESIVE TAPES WITH CUSTOMIZED PRINTING (PRINTED TAPES)

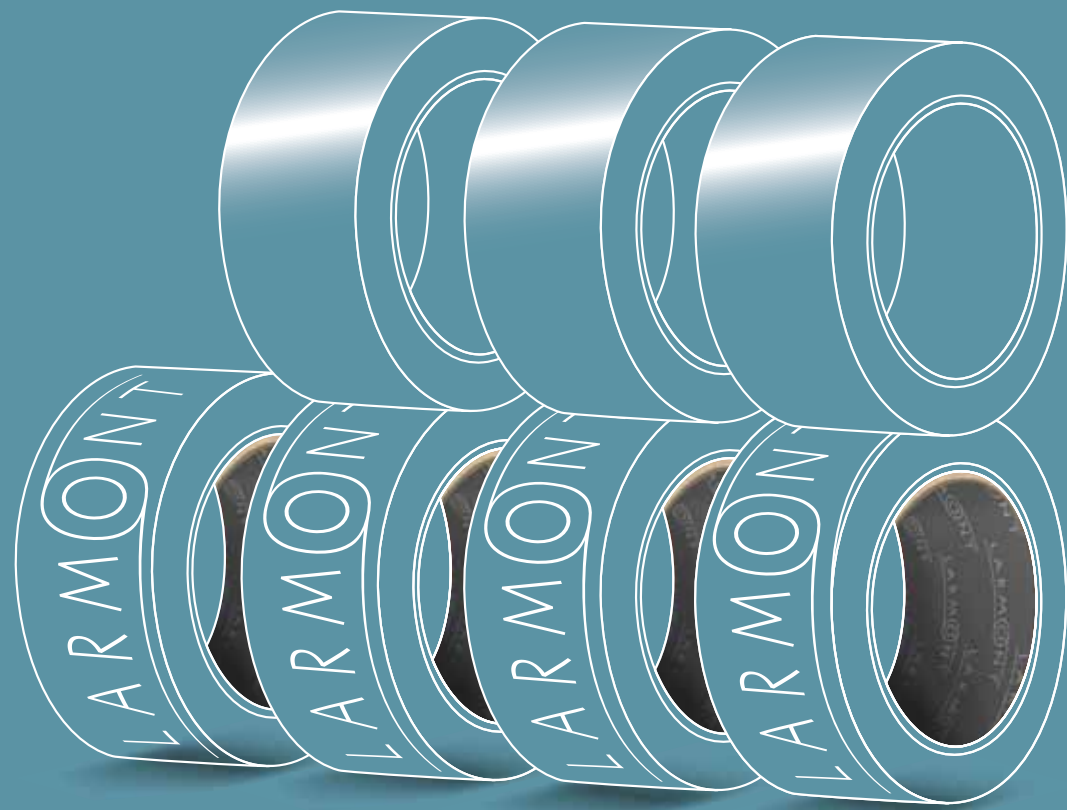


Adhesive packaging tape with the customized printing is the effective advertising tool. The customer's logo, product information, contact data, and other information can be applied on this tape.

Contact us about available sizes, types and colors. Parameters are possible on request.



TECHNICAL TAPES

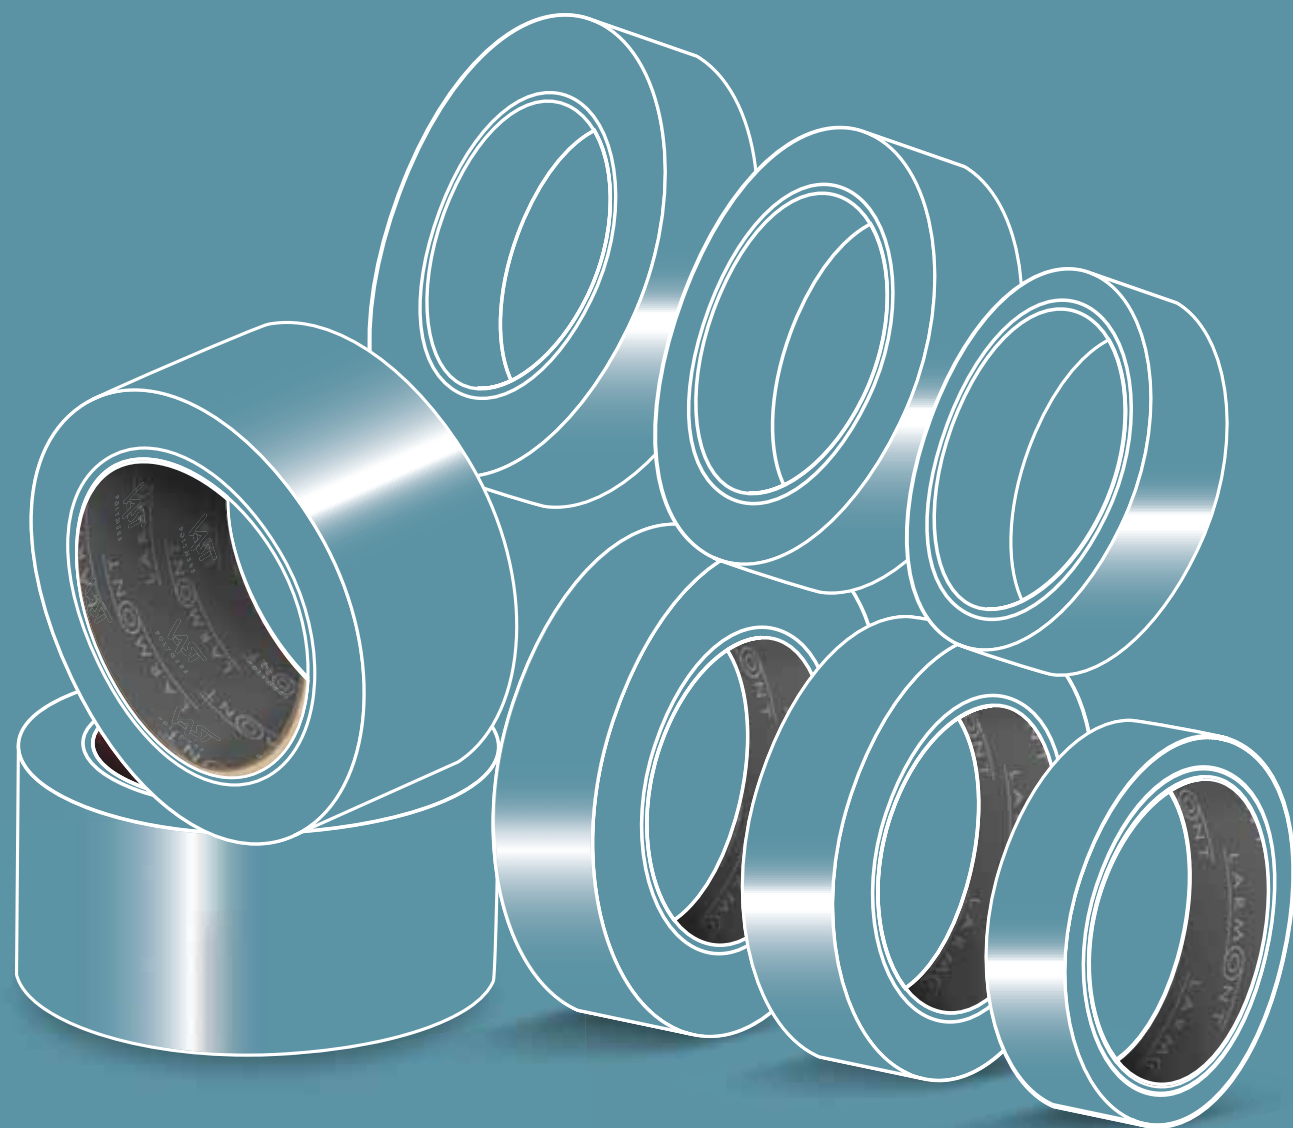

TECHNICAL TAPES

Technical tapes represent wide range of products with special features, which facilitate everyday work in many different fields - from domestic use and renovation works, to industrial use and quick repair of the broken components.

MASKING TAPES



Masking tapes were developed in order to protect various surfaces from dirt during painting. They allow to achieve straight lines, easily deform on uneven surfaces, and also, after finishing work, tear off without leaving traces of glue.



DUCT TAPES



Duct tapes are an irreplaceable „first aid“ in many emergency situations. They allow to repair damage with little effort. It is an excellent and timeless solution for quick and reliable repairs –both domestic and industrial.



DOUBLE-SIDED TAPES



Double-sided tapes, thanks to their universal structure, are used for many different industrial applications and also by craftspeople and consumers. They are perfect for bonding two parts permanently and irreversibly. Depending on the components used within a tape, it offers specific characteristics that make it suitable for various applications.



Technical tapes are used in many industries. Check which one makes running your business easier.



REPAIRS




DIY




FAIR





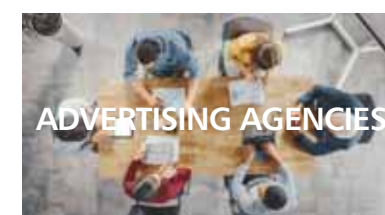



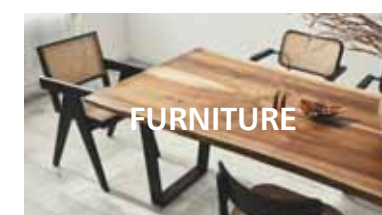





MOTORIZATION




ADVERTISING AGENCIES



FURNITURE

Type of tape		Backing material	Adhesive	Width [mm]	Length [m]	Total thickness [μm]	Color	Tape rolls per box [pcs.]	Product code	Application range	Water-resistant	UV-resistant	Temperature -resistant	Persistent adhesion [t _{max}]	Adhesion to stainless steel [N/25mm]	
MASKING TAPES																
Masking tape		Crepe paper	Synthetic rubber	19	35	100	Yellow	48	RTTMH-Y60019-0035-ATL-XY		-	●	60 °C	1h	7	
				19	50			48	RTTMH-Y60019-0050-ATL-XY							
				25	35			36	RTTMH-Y60025-0035-ATL-XY							
				25	50			36	RTTMH-Y60025-0050-ATL-XY							
				38	35			24	RTTMH-Y60038-0035-ATL-XY							
				38	50			24	RTTMH-Y60038-0050-ATL-XY							
				48	35			18	RTTMH-Y60048-0035-ATL-XY							
				48	50			18	RTTMH-Y60048-0050-ATL-XY							
		Crepe paper	Natural rubber	19	25	145	Yellow	96	RTTMS-Y60019-0025-PER-XY		-	●	60 °C	1h	6	
				19	50			96	RTTMS-Y60019-0050-PER-XY							
				25	25			72	RTTMS-Y60025-0025-PER-XY							
				25	50			72	RTTMS-Y60025-0050-PER-XY							
				38	25			72	RTTMS-Y60038-0025-PER-XY							
				38	50			72	RTTMS-Y60038-0050-PER-XY							
				48	25			36	RTTMS-Y60048-0025-PER-XY							
				48	50			36	RTTMS-Y60048-0050-PER-XY							
High temperature masking tape		Crepe paper	Natural rubber	25	35	120	Creamy	36	RTTMS-W80025-0035-ATL-XY		●	●●	80 °C	1h	5	
				25	50			36	RTTMS-W80025-0050-ATL-XY							
				48	35			18	RTTMS-W80048-0035-ATL-XY							
				48	50			18	RTTMS-W80048-0050-ATL-XY							
				25	50	145		72	RTTMS-W80025-0050-PER-XY		●	●●	80 °C	1h	7	
				48	50			36	RTTMS-W80048-0050-PER-XY							
UV-resistant masking tape		Crepe paper	Acrylic	25	35	120	Blue	36	RTTMA-NUV025-0035-ATL-XY		●●●	●●●	-	7 dni	2,5	
				25	50			36	RTTMA-NUV025-0050-ATL-XY							
				48	35			18	RTTMA-NUV048-0035-ATL-XY							
				48	50			18	RTTMA-NUV048-0050-ATL-XY							
				25	50	145		72	RTTMA-NUV025-0050-PER-XY		●●●	●●●	-	7 dni	2	
				48	50			36	RTTMA-NUV048-0050-PER-XY							
FIXING TAPES																
Duct tape		Polyethylene	Natural rubber	48	25	170	Grey	72	RTTNH-S17048-0025-PER-XY		●●●	●●●	60 °C	-	15	
					50			36	RTTNH-S17048-0050-PER-XY							
DOUBLE-SIDED TAPES																
PP tape		Polypropylene	Synthetic rubber	48	10	210 (carrier 100)	White	72	RTTDH-TPP048-0010-PER-XY		-	-	80 °C	-	14,7	
					25			36	RTTDH-TPP048-0025-PER-XY							
					50			36	RTTDH-TPP048-0050-PER-XY							
Cloth tape		Cloth	Natural rubber	48	10	240 (carrier 160)	White	72	RTTDH-WCL048-0010-PER-XY		-	-	60 °C	-	12	
					25			72	RTTDH-WCL048-0025-PER-XY							
					50			36	RTTDH-WCL048-0050-PER-XY							

STRAPPING BAND

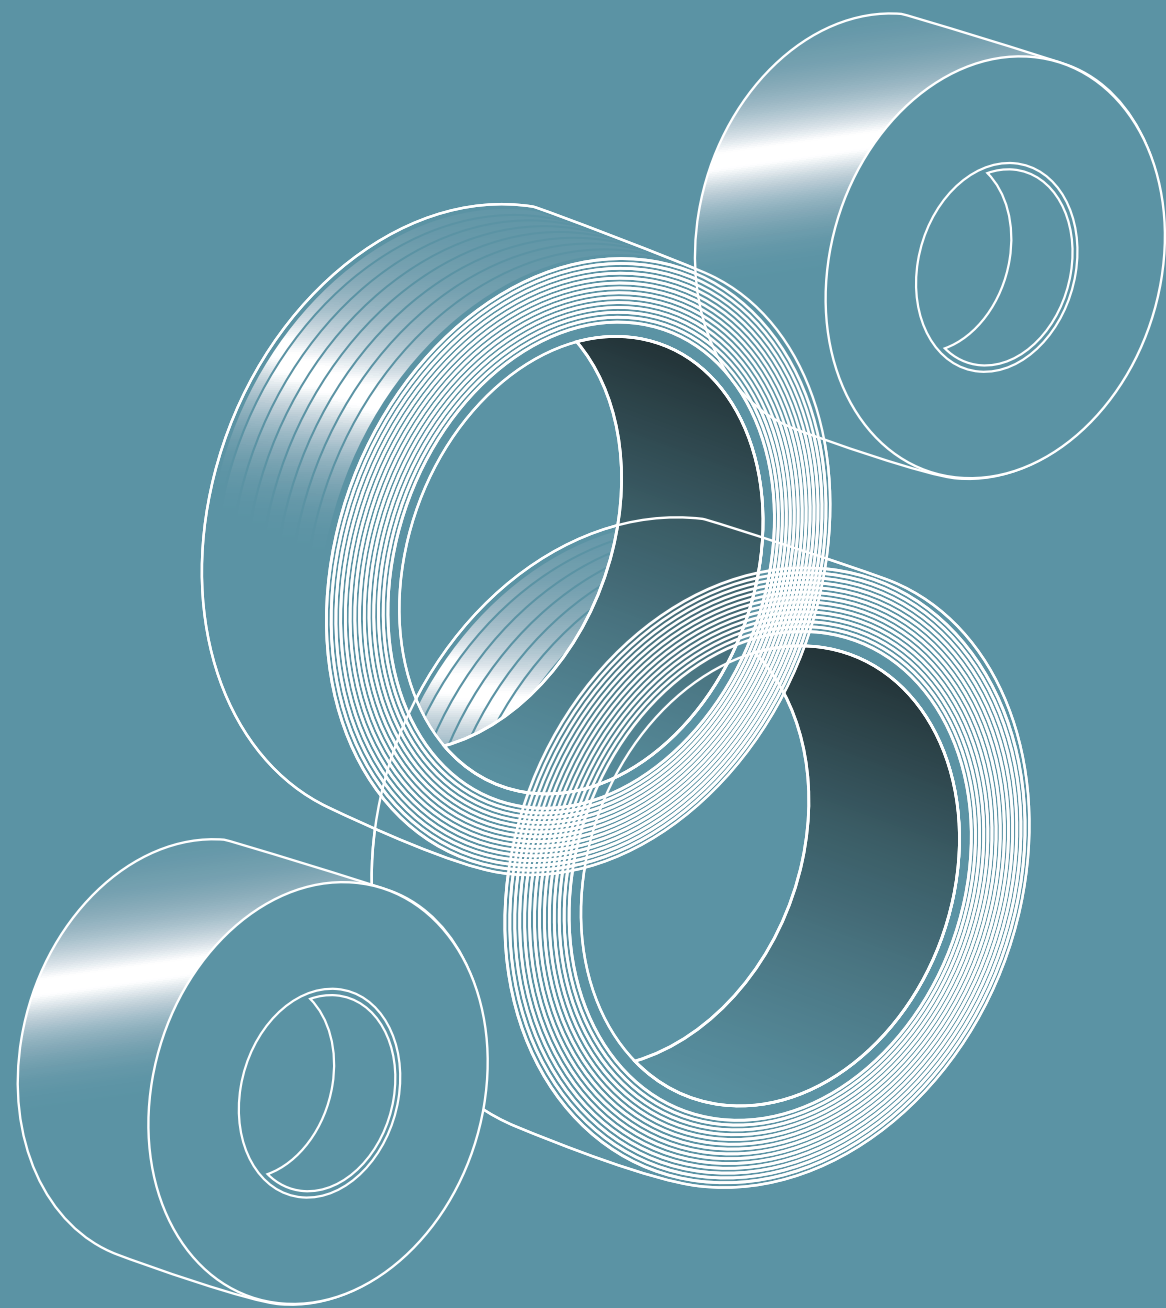

STRAPPING BAND

Strapping band is a modern packaging material used in various fields. This tape is used for packaging goods and products for their subsequent transportation or storage.

There are two types of strapping bands in the Larmont assortment:

- Polypropylene (PP) band;
- Polyester (PET) bands.



POLYPROPYLENE (PP) BAND

Polypropylene PP band is the most popular strapping band. Larmon band offers low cost of strapping per cargo unit and, additionally, they are easy to use.

A wide variety of strapping bands assortments offers possibilities to fasten and secure products with weight up to 500 kg, and, for particular packing schemes, up to 4 tons. The high quality of bands allows to use them in many industrial sectors for both manual and automatic packaging systems.

The main applications of PP bands are: strapping and securing cardboard boxes, strapping wooden elements and stabilizing products on cargo pallets.



Type of tape	Width [cm]	Thickness [cm]
PP TAPE	12	0,55
	12	0,6
	15	0,7
	15	0,6
	16	0,8

Please contact us for available sizes, types and colours.
Parameters are possible on request.

POLYESTER (PET) BANDS

Polyester tapes are used in strapping and storing heavy pallets, difficult shipments and irregular loads.

It is used for strapping and fixing various cargos, including oversized ones, in different industries: construction, woodworking, timber industry, metallurgy, textile, food and other. It is suitable for manual packaging and for use on automatic packaging equipment.

PET tape is characterized by high tensile, they can also stand high and low temperatures, and are non-sensitive to ultraviolet radiation and resistant to weather impact.



Type of tape	Width [cm]	Thickness [cm]
PET TAPE	12	0,6
	15	0,6
	15	0,7
	15	0,8
	19	1,0

Please contact us for available sizes, types and colours.
Parameters are possible on request.

SUSTAINABLE DEVELOPMENT RECYCLING PROJECTS



LARMONT pays special attention to projects of sustainable development and environmental safety, contributing to the environment preservation.

We are constantly developing our offer, expanding it with products from recycled and paper raw materials.



LARMONT offers a wide range of products of the highest quality, both functional and ecological. Our suppliers are equipped with advanced technological facilities, enabling the quality of both raw materials from which they produce stretch tapes and films, as well as finished products.

Our priority, next to the high-quality LARMONT products, is taking care of our employees and natural environment. That is why we require the highest safety standards from all our suppliers and respect for the natural environment.

LARMONT

www.larmont.pl